

Regulador de caudal plástico / latón

Regulador de caudal rosca BSP recta (gas)



Modelo	25.000	25.001	25 010	25.002	25.003	25.004	25.005	25 011	25 016	25 006	25 007	25 012
Fluido												
Diam. mang en mm	4	4	6	6	6	8	8	8	10	10	10	10
Rosca	M5	1/8"	M5	1/8"	1/4"	1/8"	1/4"	1/2"	1/8"	1/4"	3/8	1/2"
Presión de Trab	-0,75 a 10,2 bar											
Máxima Pres	11 bar											
Temp de Trabajo	-5 a 60°C											

Modelo	25008	25009	25013	
Fluido	Aire Comprimido y Vacío			
Diam. mang en mm	12	12	12	
Rosca	1/4"	3/8"	1/2"	
Presión de Trab	-0,75 a 10,2 bar			
Máxima Pres	11 bar			
Temp de Trabajo	-5 a 60°C			



+54 911 5486 0664




011 2199 7887

ventas@dineu.com.ar

www.dineu.com.ar



DiNeu[®]
Pneumatics

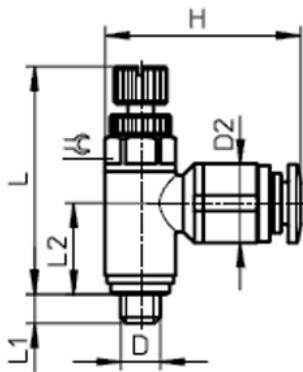

CÓDIGO	MODELO	D	D2	L	L1	L2	H	LLAVE
25.000	RCL 4 M5	M5	11	25	3	8,5	26	8
25.001	RCL 4 1/8"	1/8"	11	32	5	9,5	32	12
25.010	RCL 6 M5	M5	13	27	6	8,5	32	8
25.002	RCL 6 1/8"	1/8"	13	32	5	9,5	30	12
25.003	RCL 6 1/4"	1/4"	13	36	9	9,5	34	14
25.004	RCL 8 1/8"	1/8"	15	32	5	9,5	33	12
25.005	RCL 8 1/4"	1/4"	15	36	10	9,5	36,5	14
25.011	RCL 8 1/2"	1/2"	15	36	12	10	37	14
25.016	RCL 10 1/8"	1/8"	19	36	9	9,5	38	14
25.006	RCL 10 1/4"	1/4"	19	36	9	9,5	40	14
25.007	RCL 10 3/8"	3/8"	19	39	10	13,5	44	19
25.012	RCL 10 1/2"	1/2"	19	39	11	13,5	44	19
25.008	RCL 12 1/4"	1/4"	21	36	10	9,5	40	19
25.009	RCL 12 3/8"	3/8"	21	41,5	11	12,5	44,5	19
25.013	RCL 12 1/2"	1/2"	21	41,5	14	14	45	19

Reservado el derecho de modificación sin previo aviso

 +54 911 5486 0664

 011 2199 7887

ventas@dineu.com.ar

www.dineu.com.ar



DiNeu®
Pneumatics